


1	General information	Supplier's name or trade mark	INSPIRE		
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN		
3		Model Identifier - Luminaire Supplier reference	C200929801		
4		Light sources maker model	DLB-0892		
5		Date of placement on the market	01/09/2021		
6	Type of light source :	Lighting technology used:	LED		
7		Light source cap type (or other electric interface)	Lead wire		
8		Non-directional (NDLS) or directional (DLS) :	NDLS		
9		Mains (MLS) or non-mains (NMLS) :	NMLS		
10		Connected light source (CLS) :	no		
11		Colour-tuneable light source:	no		
12		Envelope:	no		
13		High luminance light source:	no		
14		Anti-glare shield:	no		
15		Dimmable:	no		
16	General product parameters:	Energy consumption in on-mode (kWh/1000 h)		8 kWh/1000h	
17		Energy efficiency class	E		
18		Useful luminous flux ( $\Phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°), expressed in	1060	360	
19		Correlated colour type	single value		
20		Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can	4000(single value)	K	
21		On-mode power ( $P_{on}$ ), expressed in W and rounded to the first decimal	7.6	W	
22		Standby power ( $P_{stb}$ ), expressed in W and rounded to the second decimal	0.00	W	
23		Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0.00	W	
24		Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80		
25		Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)			
26		Height (mm)	205.00	mm	
27		Width (mm)	95.00	mm	
28		Depth (mm)	0.00	mm	
29		Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution + name of picture+extension (.jpeg)			
30		Claim of equivalent power	yes		
31	If yes, equivalent power (W)	75	W		
32	Chromaticity coordinates (x and y)	X=0.373, Y=0.375			
33	Parameters directional light sources:	Peak luminous intensity (cd)			
34		Beam angle in degrees (no decimal), or the range of beam angles that can be set	0	Degrees	
35	Parameter for LED and OLED light sources:	R9 colour rendering index value	5		
36		Survival factor rounded to the second decimal (>0.xx)	0.00		
37		Lumen maintenance factor rounded to the second decimal (>0.xx)	0.00		
38	Parameters for LED and OLED mains lights sources:	displacement factor (cos $\phi_1$ ) rounded to the second decimal	0.00		
39		Colour consistency in McAdam ellipses	3.0		
40		Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-		
41		If yes then replacement claim (W) (no decimal)	0.0	W	
42		Flicker metric (Pst LM) rounded to the first decimal	0.0		
43		Stroboscopic effect metric (SVM) rounded to the first decimal	0.0		
44	Technical documentation name (in case of light source product)				
45	Light source removing instruction name (in case of containing product)		C200929801_light source remove instruction.pdf		



## LIGHT SOURCE REMOVING INSTRUCTION

Creation date (dd/mm/yyyy) :

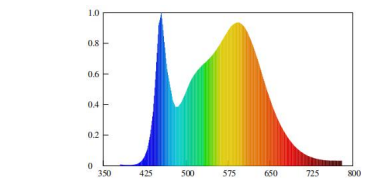




14/10/2021

Last update date (dd/mm/yyyy) :

14/10/2021

1	General information	Supplier's name or trade mark	INSPIRE
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS0001, 59790 RONCHIN
3		Model Identifier - Luminaire Supplier reference	C200929801
4		Light sources maker model	DLB-0892

Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimise their power consumption during light source testing

	Explanation of the step	Pictures	Tools
Step 1	remove lampshade		by hand
Step 2	Pull out the wires on the lamp board of the light source that needs to be replaced		by hand
Step 3	Use a Phillips screwdriver and needle-nose pliers to remove the screws and nylon washers that fix the lamp board, and remove the light source lamp board that needs to be replaced		screwdriver and needle-nose pliers
Step 4	Spot the non-cured thermal grease on the back of the new light source, and fix it to the chassis with screws, nuts, and nylon washers, connect the wires, and pay attention to the polarity of the wires.		by hand
Step 5	Install back the lampshade		by hand
Step 6			
Step 7			

