




# Technical data sheet

Date of creation	18/02/19
Revision index	5
Date of Validation	18/09/2019

<u>Description</u>	VD80 Woodscrew CS PH Brass
--------------------	----------------------------

<u>Standard references :</u>	DIN 7997
------------------------------	----------

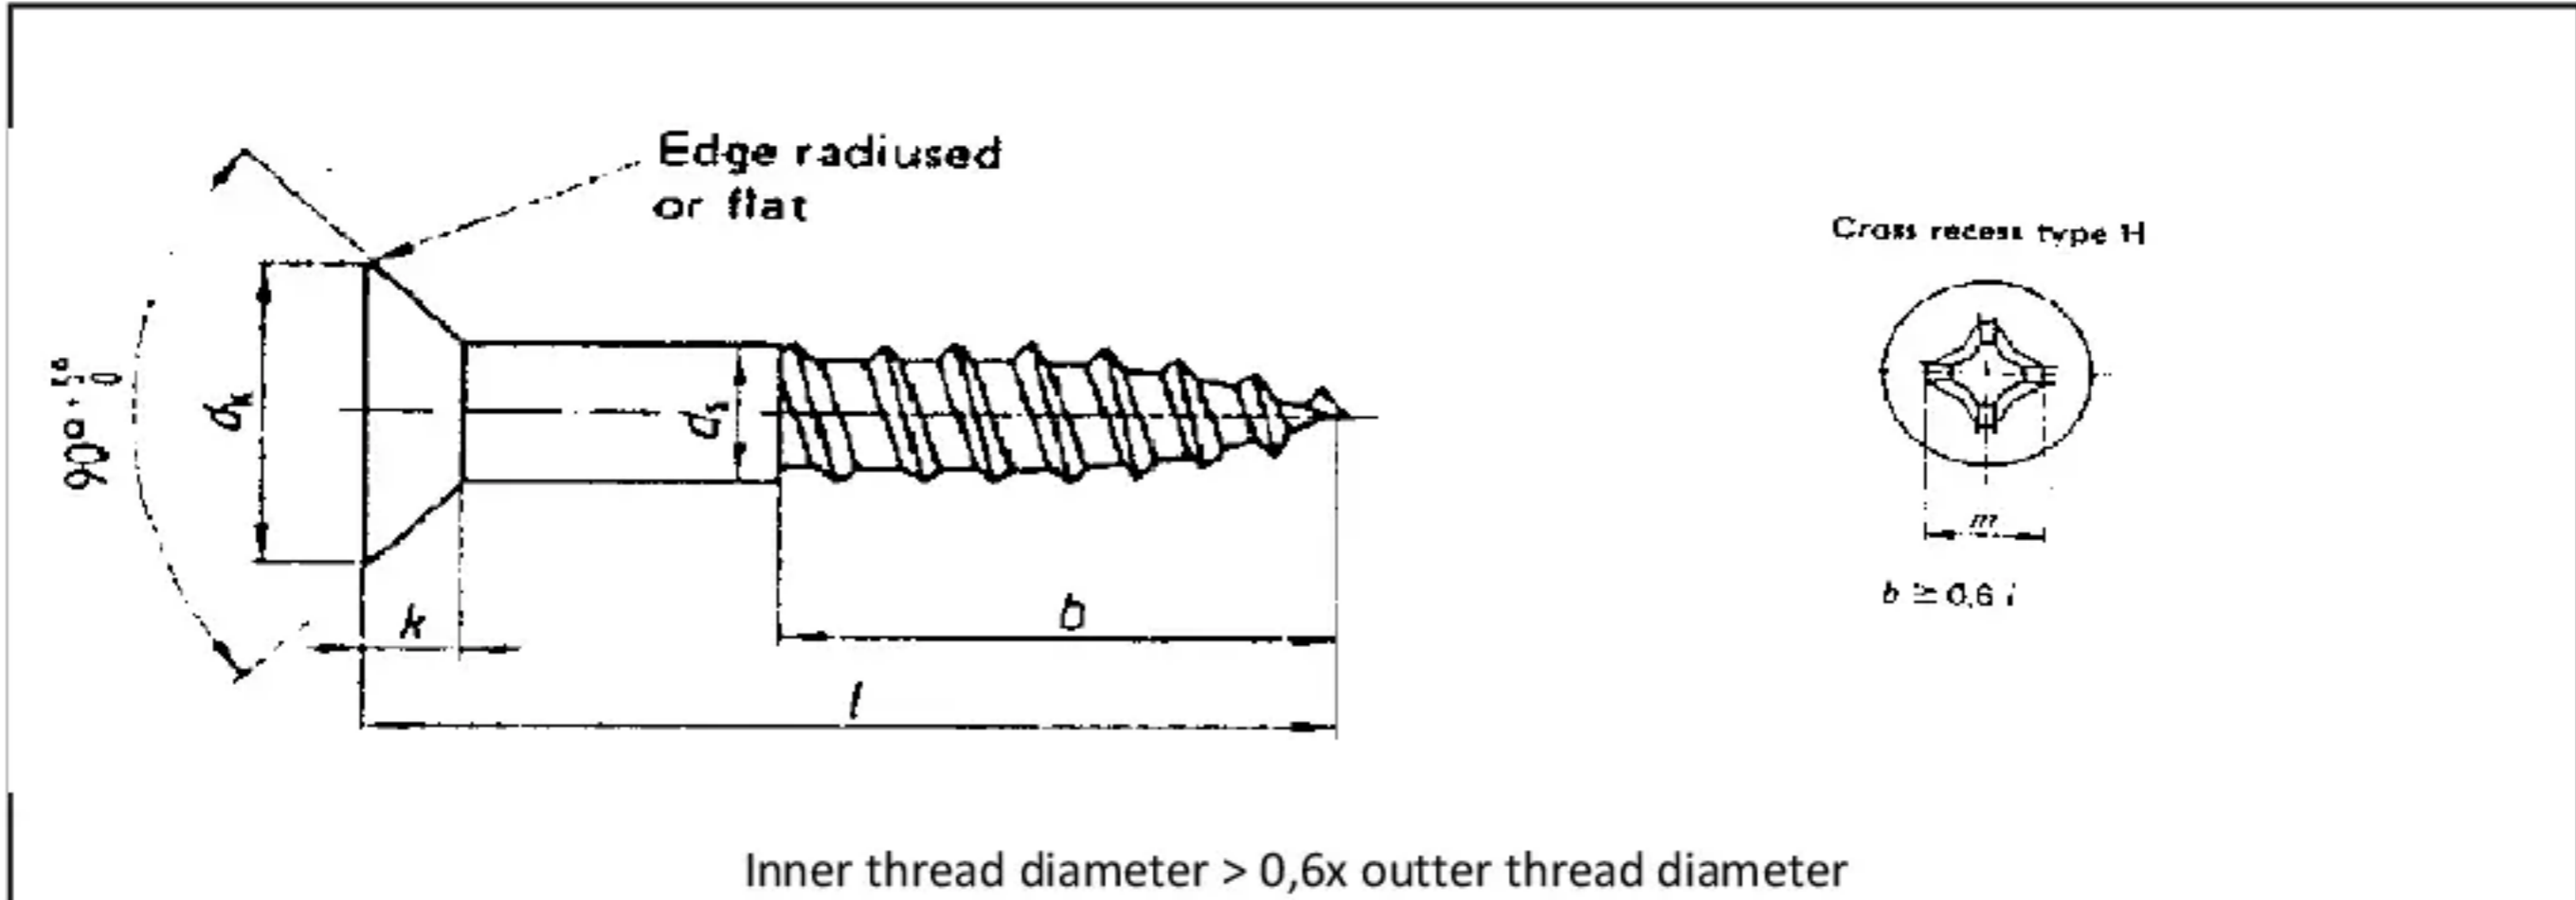

## Dimensional

All dimensions are in millimeters.

No eccentricity allowed (not visible at 50cm distance).

No chips and no sharp edges except on tip, thread and specific self-drilling or self-tapping functions.

No broken tip, no broken thread, no hollow teeth, no burnt teeth, no fall-off and no head splitting allowed.

The surface must be smooth and free of oil, foam, dust, rust, black spot or any other undesirable phenomena.

thread size		(2)	2,5	3	3,5	4	4,5	5	(5,5)	6	(7)	(8)
ds	max	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8
	min	1,6	2,1	2,6	3,02	3,52	4,02	4,52	5,02	5,52	6,42	7,42
dk	Nominal dimensions	3,8	4,7	5,6	6,5	7,5	8,3	9,2	10,2	11	12,5	14
	max	4,18	5,08	5,98	6,95	7,95	8,75	9,65	10,8	11,55	13,05	15,05
	min	3,42	4,32	5,22	6,05	7,05	7,85	8,75	9,65	10,45	11,95	13,95
k	max	1,2	1,5	1,65	1,93	2,2	2,35	2,5	2,75	3	3,5	4
		1			2			3			4	
Type H	m		2,7	2,9	3,9	4,4	4,6	4,8				
	Depth	min	1,25	1,5	1,4	1,9	2,1	2,29	2,31	2,8	2,95	3,9
		max	1,55	1,8	1,9	2,4	2,6	2,79	2,81	3,3	3,53	4,4