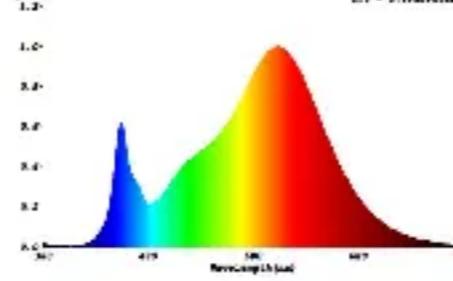


PRODUCT INFORMATION SHEET (ANNEX 5)

Creation date (dd/mm/yyyy) : 10/01/2022

Last update date (dd/mm/yyyy) : 10/01/2022

General information	Supplier's name or trade mark		
	Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN	
	Model Identifier - luminaire Supplier reference	S200800702BK_C2109DIUNA4_C200800706BK	
	Light sources maker model	DLB-0917	
	Date of placement on the market	10/01/2022	
Type of light source:	Lighting technology used:	LED	
	Light source cap type (or other electric interface)	connecting leads	
	Non-directional (NDLS) or directional (DLS):	NDLS	
	Mains (MLS) or non-mains (NMLS):	NMLS	
	Connected light source (CLS):	no	
	Colour-tunable light source:	no	
	Envelope:	no	
	High luminance light source:	no	
	Anti-glare shield:	no	
	Dimmable:	only with specific dimmers	
	Energy consumption in on-mode (kWh/1000 h)	5 kWh/1000h	
	Energy efficiency class	D	
	Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°),	704	360
	Correlated colour type	range	
General product parameters:	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K,	3000-6500(range)	K
	On-mode power (P_{on}), expressed in W and rounded to the first decimal	4.7	W
	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0.00	W
	Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0.00	W
	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90	
	Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)		
	Height (mm)	383.00	mm
	Width (mm)	10.00	mm
	Depth (mm)	1.10	mm
	Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution + name of picture+extension (.jpeg))	S200800702BK_C2109DIUNA4_C200800706BK_spectral power distribution 	
	Claim of equivalent power	-	
	If yes, equivalent power (W)	W	
	Chromaticity coordinates (x and y)	X=0.440, Y=0.403	
Parameters for directional light sources:	Peak luminous intensity (cd)	cd	
	Beam angle in degrees (no decimal), or the range of beam angles that can be set	Degrees	
Parameter for LED and OLED light sources:	R9 colour rendering index value	3	
	Survival factor rounded to the second decimal (00.xx)	0.90	
	Lumen maintenance factor rounded to the second decimal (00.xx)	0.96	
	displacement factor ($\cos \phi_1$) rounded to the second decimal	0.00	
	Colour consistency in McAdam ellipses	0.0	
Parameters for LED and OLED mains lights sources:	Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-	
	If yes then replacement claim (W) (no decimal)	0.0	W
	Flicker metric (Pst LM) rounded to the first decimal	1.0	
	Stroboscopic effect metric (SVM) rounded to the first decimal	0.4	
	Technical documentation name (in case of light source product)		
	Light source removing instruction name (in case of containing product)	00800702BK_C2109DIUNA4_C200800706BK_light source remove instruction.p	