

Product identification

ADEO Ref	Supplier Ref	EAN CODE	Weight Packaging(Kg)	Size Packaging(Cm)
831622	B16-12X100-8D1	3276007107715	0.025	12*8*4.5
831633	B16-10X100-10D1	3276007107661	0.025	12*8*4.5
831635	B16-8X100-12D1	3276007107593	0.025	12*8*4.5
831612	B16-12X120-12D3	3276007107722	0.038	18*8*6
831632	B16-10X120-15D3	3276007107678	0.038	18*8*6
831636	B16-8X70-2P	3276007107579	0.003	13.5*4.8
831619	B16-8X80-2P	3276007107586	0.003	13.5*4.8
831609	B16-10X40-2P	3276007107616	0.003	13.5*4.8
831613	B16-10X50-2P	3276007107623	0.003	13.5*4.8
831623	B16-10X60-2P	3276007107630	0.003	13.5*4.8
831618	B16-10X70-2P	3276007107647	0.003	13.5*4.8
831608	B16-12X50-2P	3276007107685	0.003	13.5*4.8
831617	B16-12X60-2P	3276007107692	0.003	13.5*4.8
831524	B16-8X30-4P	3276007107531	0.003	13.5*4.8
831523	B16-8X40-4P	3276007107548	0.003	13.5*4.8
831548	B16-8X50-4P	3276007107555	0.003	13.5*4.8
831562	B16-8X60-4P	3276007107562	0.003	13.5*4.8
831626	B16-10X30-4P	3276007107609	0.003	13.5*4.8
831525	B16-6X40-6P	3276007107487	0.003	13.5*4.8
831537	B16-6X50-6P	3276007107494	0.003	13.5*4.8
831620	B16-6X60-6P	3276007107500	0.003	13.5*4.8
830893	B16-5X30-8P	3276007107432	0.003	13.5*4.8
831586	B16-5X40-8P	3276007107456	0.003	13.5*4.8
831594	B16-6X30-8P	3276007107470	0.003	13.5*4.8
831549	B16-8X25-8P	3276007107524	0.003	13.5*4.8
830892	B16-4X30-10P	3276007107401	0.003	13.5*4.8

830891	B16-5X20-10P	3276007107425	0.003	13.5*4.8
830890	B16-6X20-10P	3276007107463	0.003	13.5*4.8
831563	B16-8X20-10P	3276007107517	0.003	13.5*4.8
830894	B16-4X20-12P	3276007107388	0.003	13.5*4.8
830888	B16-4X16-15P	3276007107449	0.003	13.5*4.8
830889	B16-4X12-20P	3276007107418	0.003	13.5*4.8
831634	B16-10X80-2P	3276007107654	0.006	13.5*10.8
831625	B16-12X80-2P	3276007107708	0.006	13.5*10.8

Template version history			
Version	Status	Date Status	Comments
V.0	Under construction	20/08/2018	Template construction
V.1	Validated construction	30/09/2019	Validated Template

Object

Technical data sheet of products

Technical data

«Zhejiang Excellent Industries Co.,Ltd »

«No.57 Donggang Road, Daqiao New District, Haiyan, 314304 Zhejiang, China »

Name product		Contain battery	
Power in Watt		Weight of the battery (gram)	
Nett Weight in gram (without batteries, without packaging)		Type of battery (Li-ion / Alkalin, ...)	
Size of product: Lxlxh in centimetre			
Accessories included: detailed it			
Weight packaging			
Size packaging			


Remark: The main technical features could be adjusted by supplier based on different kinds of products.

Photo

Date of creation	2020/03/02
Revision index	
Date of Validation	2020/03/02

Description	B16 Hex socket cap screw Steel 8.8 WZP+Cr3
-------------	--

Standard reference	DIN 912
--------------------	---------

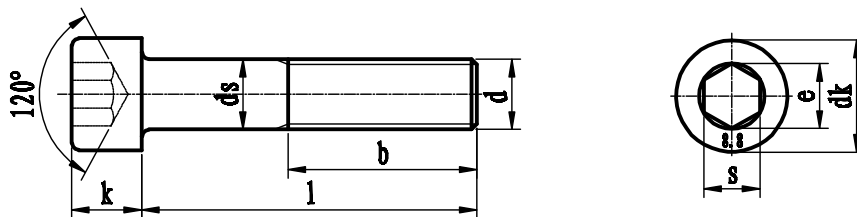

Dimensional

All dimensions are in millimeters.

No eccentricity allowed (not visible at 50cm distance).

No broken thread, no hollow teeth, no burnt teeth, no fall-off.

The surface must be smooth and free of oil, foam, dust, rust, black spot or any other undesirable phenomenas.

size	M4	M5	M6	M8	M10	M12
P	0.7	0.8	1	1.25	1.5	1.75
d	max 3.98 min 3.84	max 4.98 min 4.74	max 5.97 min 5.69	max 7.97 min 7.63	max 9.96 min 9.59	max 11.96 min 11.54
b	≈ 20	≈ 22	≈ 24	≈ 28	≈ 32	≈ 36
dk	max 7.22 min 6.78	max 8.72 min 8.28	max 10.22 min 9.78	max 13.27 min 12.73	max 16.27 min 15.73	max 18.27 min 17.73
ds	max 4.0 min 3.82	max 5.0 min 4.82	max 6.0 min 5.82	max 8.0 min 7.78	max 10.0 min 9.78	max 12.0 min 11.73
k	max 4.0 min 3.82	max 5.0 min 4.82	max 6.0 min 5.7	max 8.0 min 7.64	max 10.0 min 9.64	max 12.0 min 11.57
e	min 3.44	min 4.58	min 5.72	min 6.86	min 9.15	min 11.43
s	size 3.0 max 3.08 min 3.02	size 4.0 max 4.095 min 4.02	size 5.0 max 5.14 min 5.02	size 6.0 max 6.14 min 6.02	size 8.0 max 8.175 min 8.025	size 10.0 max 10.175 min 10.025
Proof load (N)	min 5100	min 8230	min 11600	min 21200	min 33700	min 48900

L	12	16	20	25	30	40
max	12.35	16.35	20.42	25.42	30.42	40.5
min	11.65	15.65	19.58	24.58	29.58	39.5

L	50	60	70	80	100	120
max	50.5	60.6	70.6	80.6	100.7	120.7
min	49.5	59.4	69.4	79.4	99.3	119.3

Mechanical properties

Material:	10B21
Coating:	White zine plated
Hardness:	250-335 HV
Remark:	