


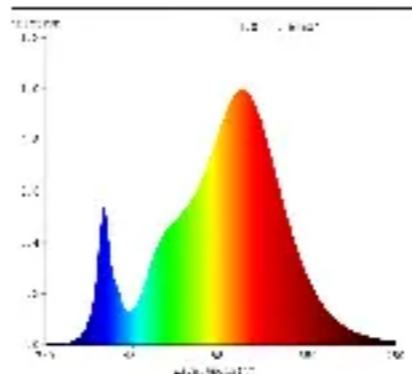

PRODUCT INFORMATION SHEET (ANNEX 5)

Creation date (dd/mm/yyyy) : 2022/3/30

Last update date (dd/mm/yyyy) : 2022/3/30

1	General information	Supplier's name or trade mark	INSPIRE		
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN		
3		Model Identifier - Luminaire Supplier reference	DE26811H10-BL, DE26811H10-WH		
4		Light sources maker model	769-001#		
5		Date of placement on the market	30/05/2022		
6	Type of light source:	Lighting technology used:	LED		
7		Light source cap type (or other electric interface)	no		
8		Non-directional (NDLS) or directional (DLS):	NDLS		
9		Mains (MLS) or non-mains (NMLS):	NMLS		
10		Connected light source (CLS):	no		
11		Colour-tunable light source:	no		
12		Envelope:	no		
13		High luminance light source:	no		
14		Anti-glare shield:	no		
15		Dimmable:	yes		
16	General product parameters:	Energy consumption in on-mode (kWh/1000 h)	8	kWh/1000h	
17		Energy efficiency class	E		
18		Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°), expressed in Lm	1000 lm in sphere	360	
19		Correlated colour type	steps		
20		Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3000; 4000; 6500	K	
21		On-mode power (P_{on}), expressed in W and rounded to the first decimal	7.2	W	
22		Standby power (P_{sb}), expressed in W and rounded to the second decimal	0.00	W	
23		Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0.00	W	
24		Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80		
25		Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)			
26			Height (mm)	247.00	mm
27			Width (mm)	32.00	mm
28			Depth (mm)	1.70	mm
29			Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution + name of picture+extension (.jpg)	DE26811H10-BL/DE26811H10-WH spectral power distribution.jpg 	
30		Claim of equivalent power	yes		
31		If yes, equivalent power (W)	72	W	
32		Chromaticity coordinates (x and y)	0.440;0.403 or 0.380;0.380 or 0.313;0.337		
33	Parameters for directional light sources:	Peak luminous intensity (cd)			
34		Beam angle in degrees (no decimal), or the range of beam angles that can be set	0 Degrees		
35	Parameter for LED and OLED light sources:	R9 colour rendering index value	1		
36		Survival factor rounded to the second decimal (>0.xx)	0.90	%	
37		Lumen maintenance factor rounded to the second decimal (>0.xx)	0.96	%	
38	Parameters for LED and OLED mains lights sources:	displacement factor (cos ϕ_1) rounded to the second decimal			
39		Colour consistency in McAdam ellipses	6.0		
40		Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.			
41		If yes then replacement claim (W) (no decimal)	0.0	W	
42		Flicker metric (Pst LM) rounded to the first decimal			
43	Stroboscopic effect metric (SVM) rounded to the first decimal				
44	Technical documentation name (in case of light source product)				
45	Light source removing instruction name (in case of containing product)		DE26811H10-BL/DE26811H10-WH spectral power distribution.jpg		