

	<h2>Product Technical data sheet : Supplier Declaration</h2>
--	--

Product identification			
<b>Adeo Ref</b>	82231796		
<b>Product EAN</b>	3276000679882		
<b>Supplier ref</b>	V16-3.5x20-35P1		

Template version history			
Version	Status	Date Status	Comments
V.0	Under construction	24/12/2018	Template construction

### Object

Technical data sheet of products

### Technical data

Name product	CHIPBOARD SCREW CS PZ STEEL WZP+CR3
<b>V16</b>	Chipboard Screw CS PZ 6 nibs Type 17 Steel WZP+Cr3
Unit: mm	


Unit: mm							
D	d1	d2	DK	PZ	t	P	
3	2.75~3.00	1.75~2.10	5.50~6.05	1	1.60~2.11	1.35	
3.5	3.20~3.50	2.00~2.30	6.40~7.05	2	1.60~2.16	1.6	
4	3.70~4.00	2.25~2.60	7.40~8.05	2	2.05~2.51	1.8	
4.5	4.20~4.50	2.45~2.85	8.40~9.05	2	2.46~3.10	2	
5	4.70~5.10	2.80~3.30	9.40~10.05	2	2.99~3.55	2.2	
6	5.70~6.15	3.50~3.95	11.30~12.10	3.00	2.99~3.55	2.60	

\* Remarks: d1 > 0,6.d2

L	Tolerance (min.)		L1	Tolerance	Material:	Steel C1022	
12	-0.9	11.10-12.00	FULL	NA	Coating:	White zinc plated + Cr3	
16	-0.9	15.10-16.00	FULL	NA	Coating Thickness:	3-5µm	
20	-1.05	18.95-20.00	FULL	NA	Corrosion Resistance:	36H Red rust apparition	
25	-1.05	23.95-25.00	FULL	NA	Core Hardness:	300-500 HV	
30	-1.05	28.95-30.00	FULL	NA	Sureface Hardness:	550-800 HV	
35	-1.25	33.75-35.00	FULL	NA	Breaking Torque:	M3.0	15 kg.cm
40	-1.25	38.75-40	FULL	NA		M3.5	20 kg.cm
45	-1.25	43.75-45	FULL	NA		M4.0	30 kg.cm
50	-1.25	48.75-50	FULL	NA		M4.5	43 kg.cm
60	-1.5	58.50-60	FULL	NA		M5.0	62 kg.cm
70	-1.5	68.50-70	60	58.65-61.35		M6.0	108 kg.cm
80	-1.5	78.50-80	60	58.65-61.35	* Nib Height:	0.4+/- 0.2 mm	
90	-1.75	88.25-90	60	58.65-61.35	Type 17 Length	Regular	3~4 thread
100	-1.75	98.25-100	60	58.65-61.35		L>20	6.0~8.0mm
120	-1.75	118.25-120	70	68.65-71.35	* Type 17 Depth	<ul style="list-style-type: none"> <li>• Type 17 length complies to spec</li> <li>• Type 17 forming to the point = Not required to check depth</li> </ul>	
140	-2	138.00-140	70	68.65-71.35			

Remark: The main technical features could be adjusted by supplier based on different kinds of products.

Photo

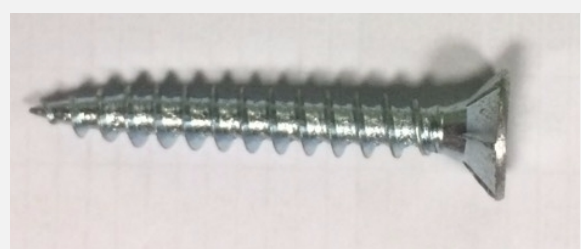


**Ø 3.5<sub>mm</sub> L 20<sub>mm</sub> × 35**

   **V16**

3 276000 679882

- FR** Vis à bois aggloméré en acier zingué + Cr3
- ES** Tornillos de acero cromado y cincado para aglomerado
- PT** Parafusos em aço zincado para aglomerado + Cr3
- IT** Viti per compensato in acciaio zincato + Cr3
- EL** Νοβοπανόβιδες γαλβανιζέ + Cr3
- PL** Wkręty ze stali ocynkowanej do płyt wiórowych + Cr3
- RU** Оцинкованные самонарезающие шурупы для ДСП с дополнительным покрытием Cr3
- KZ** Ағаш-жаңқалы тақтаға арналған мырыш қабатты болат бұрандалар + Cr3
- UA** Гвинти з оцинкованої сталі для ДСП з додатковим покриттям тривалентним хромом
- RO** Şurub din oţel zincat pentru plăci aglomerate + Cr3
- BR** Parafusos de Aço Zincado para Aglomerado + Cr3
- ZH** 镀锌钢纤维板螺钉+Cr3
- EN** Zinc Plated Steel Chipboard Screws + Cr3

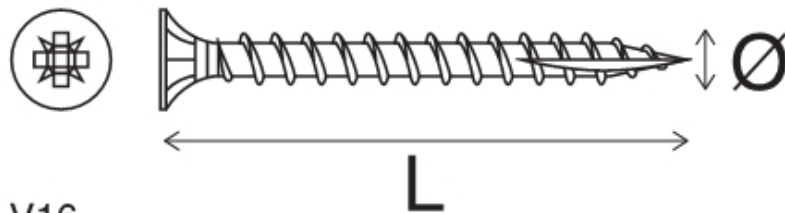

V16

Made in Vietnam